

Weights

Operating weight	1749 kg
Operating weight with canopy	1632 kg
Additional weight for long dipperstick	9 kg
Ground pressure with rubber tracks	30.06 kPa

Engine

Make / model	Yanmar / 3TNV74F-SPBC (Stage V)
Fuel	Diesel
Number of cylinders	3
Displacement	993 cm ³
Maximum NET power (ISO 9249)	11.0 kW
Maximum NET torque (ISO 9249)	50.2 Nm

Hydraulic System

Pump type	Dual piston pump with gear pump
Pump capacity	41.30 L/min
Piston pump capacity	30.00 L/min
Auxiliary flow	30.00 L/min
Auxiliary relief	180.0 bar

Performance

Digging force, dipperstick (ISO 6015)	9108 N
Digging force, bucket (ISO 6015)	16177 N
Drawbar pull	19302 N
Travel speed, low range	2.7 km/h
Travel speed, high range	4.3 km/h

Slew System

Boom swing, left	80.0°
Boom swing, right	60.0°
Slew rate	10.1 RPM

Fluid Capacities

Fuel reservoir	19.00 L
Hydraulic reservoir	13.90 L

Environmental


Noise level LpA(EU Directive 2006/42/EC)	81 dB(A)
Noise level LWA(EU Directive 2000/14/EC)	93 dB(A)
Whole body vibration (ISO 2631-1)	0.91 ms ⁻²
Hand-arm vibration (ISO 5349-1)	1.78 ms ⁻²

Standard Features

230 mm rubber track	Hydraulic and travel control lockout
980 mm dozer blade with two 190 mm blade extensions	Hydraulic joystick controls
Battery disconnect switch	Hydraulically retractable undercarriage from 1360 mm to 980 mm
Control console locks	980 mm
Counterweight	Retractable seat belt
Cupholders	TOPS/ROPS/FOPS canopy ¹
Double acting auxiliary hydraulics	Two speed travel
Engine monitor with auto shutdown	Upper structure four point tie down
Foldable and ergonomic travel pedals	Water separator
Full fuel warning alarm	Work light (boom)
Horn	Warranty: 24 months, 2000 hours (whichever occurs first)


1. Roll Over Protective Structure (ROPS) – Meets requirements of ISO 3471. Tip Over Protective Structure (TOPS) – Meets requirements of ISO 12117. Falling Object Protective Structure (FOPS) - Meets requirements of ISO 3449.

Working Range

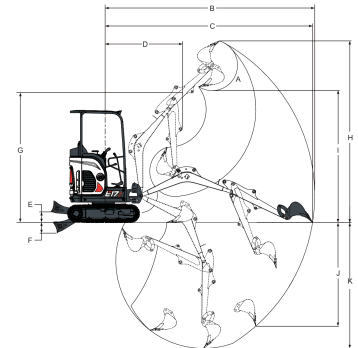

(A)	196.0°	(F*)	254.0 mm
(B)	3971.0 mm	(G)	2406.0 mm
(C)	3923.0 mm	(H)	3378.0 mm
(D)	1560.0 mm	(I)	2369.0 mm
(E)	220.0 mm	(J)	1810.0 mm
(E*)	300.0 mm	(K)	2249.0 mm
(F)	204.0 mm		

Dimensions

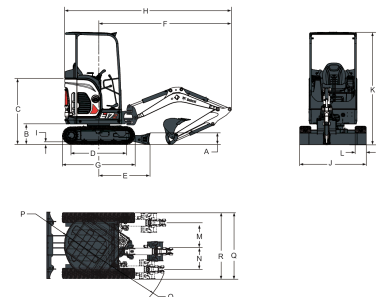

(A)	235.0 mm	(J*)	1360.0 mm
(B)	419.0 mm	(K)	2297.0 mm
(C)	1138.0 mm	(L)	230.0 mm
(D)	1114.0 mm	(M)	450.0 mm
(E)	1045.0 mm	(N)	638.0 mm
(F)	2715.0 mm	(O)	1190.0 mm
(G)	1476.0 mm	(P)	690.0 mm
(H)	3450.0 mm	(Q)	1532.0 mm
(I)	25.0 mm	(R)	1370.0 mm
(J)	980.0 mm		

Options

Demolition package (boom, arm, bucket cylinder covers & HD travel hoses guard)	Additional halogen lights
Object handling package (Valves, OWD, Lifteye)	Beacon
Long dozer blade	Special application kit
AUX1 direct return to tank	L/R mirrors
AUX1 on arm	Fire extinguisher
Keyless ignition	Klacc C and MS01 couplers
Travel motion alarm	